

RANGE TH+ GUILLOTINE

PRODUCT INFORMATION

Using 32- or 44-mm-thick double or triple glazing, the Vitrocsa TH+ range is for sliding window surfaces up to 500 kg per pane, depending on the glass supplier.

The excellent insulating properties of the profiles, in combination with the glass, enable current low energy consumption standards to be met.


RAILS + FRAMES

- Embedded and concealed in the floor, wall and ceiling
- Frame just 140 mm wide for a birail (mono: 64 mm + 12 mm seal)
- Saline treatment specially adapted for coastal projects

VERTICAL CONNECTION


- 22 mm
- Reinforced for very windy locations or installation at high altitudes

MAIN CROSS SECTIONS G2

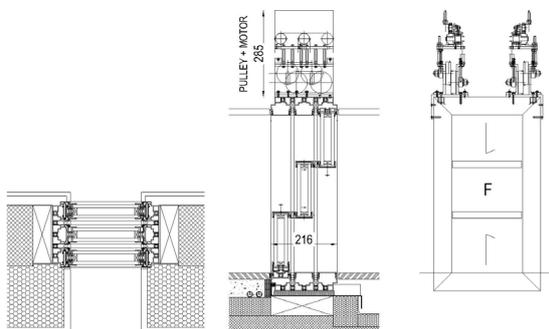

CLOSURE MECHANISM

- 1-point closure button (029, 035, 055)
- Cylinder
- Range of options for electric closure
- Alarms

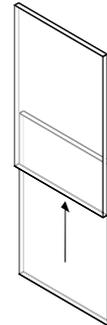

GLAZING

- 32 mm ou 44 mm
- 500 kg par vantail

OPTIONS

There are two types of guillotine:

- 1) A system with two glass panes which counter-balance one another
- 2) A counterweight system on one side or both sides of the frame

These can be manual or motorised, provided that the weight is always counterbalanced.

Top part mechanism:

- Type 1) Manual: 158 mm
Motorised: 280 mm
- Type 2) Manual: 180 mm
Motorised: 180 mm

See configuration diagrams page

VITROCSA Headquarters
Orchidées Constructions SA
Rue de la Gare 8
2024 Saint-Aubin-Sauges
Switzerland


T +41 24 436 22 02
F +41 24 436 22 02
www.vitrocsa.com
info@vitrocsa.com

V I T R O C S A

THE MINIMALIST WINDOW


RANGE TH+ GUILLOTINE

MAIN CROSS SECTIONS G3

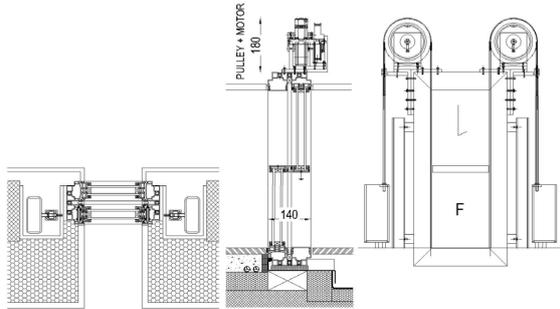


CONFIGURATION DIAGRAMS


TH+ G1: two counterbalanced panes;
birail-trirail; manual




TH+ G4: NON independent
counterweight on each side (1
motor, 2 sliding panes) (manual or
motorised)




TH+ G1HW: two counterbalanced
panes; birail-trirail; heavy (<300 kg)




TH+ G5: one counterweight on
one side (1 sliding pane) (manual
or motorised)




TH+ G2: two counterbalanced panes;
birail-trirail; motorised




TH+ G5A: two independent
counterweights on one side
(same as G5 but with 2 motors/2
sliding panes)




TH+ G3: one counterweight on each
side (manual or motorised)




TH+ G6: 3 panes, 1 driven and
2 floating, 1 motor



TH+ G3A: one counterweight on each
side but inverted compared to the G3
(manual or motorised)



TH+ G6A: 3 panes, 2 driven and
1 floating, 2 motors





RANGE TH+ GUILLOTINE

PERFORMANCE

To clearly demonstrate the properties of the VITROCSA GUILLOTINE TH+ window, we have conducted standardised tests in an accredited laboratory (SWISS TESTING SERVICE NUMBER STS 317).

The results of these investigative tests are shown in the table below:

TH+ guillotine	Standards (test and classification)	Classification
Air permeability	EN 1026 (test) EN 12207 (classification)	Class 3
Water permeability	EN 1027 (test) EN 12208 (classification)	Class 9A
Wind resistance	EN 12211 (test) EN 12210 (classification)	Class C2/B3/4A