


V32 RANGE SLIDING

PRODUCT INFORMATION

The Vitrocsa V32 range has thermal reinforcement and a fibreglass profile.

This range is designed for standard fixed or sliding openings



RAILS + FRAMES

- Embedded and concealed in the floor, wall and ceiling
- Thinner frames, just 124 mm wide for a birail (mono: 56 mm + 12 mm seal)
- Saline treatment specially adapted for coastal projects.

VERTICAL CONNECTION

- 23 mm
- Reinforced for very windy locations or installation at high altitudes
- Optimised heat retention with fibreglass towers


CLOSURE MECHANISM

- 2-point closure button
- Cylinder
- Range of options for electric closure
- Alarms

GLAZING

- 32 mm
- Panels up to 12 m² (4 x 3 m), vertical or horizontal

MAIN CROSS SECTIONS

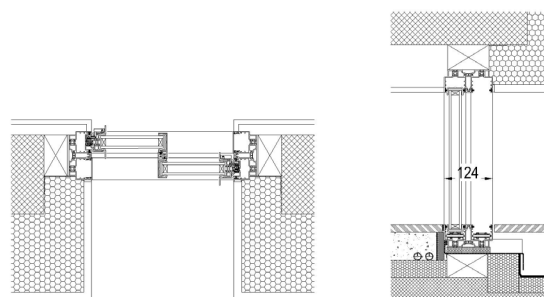

OPTIONS

- Standard sliding (up to 12 m²)
- Invisible frame with 1 groove
- Fixed (up to 12 m²)
- Open angle
- Pocket

VITROCSA Headquarters
Orchidées Constructions SA
Rue de la Gare 8
2024 Saint-Aubin-Sauges
Switzerland

T +41 24 436 22 02
F +41 24 436 22 02
www.vitrocsa.com
info@vitrocsa.com

V I T R O C S A

THE MINIMALIST WINDOW