


V56 RANGE INVISIBLE FRAME WITH TWO TRACKS

PRODUCT INFORMATION

The Vitrocsa V56 range with the invisible frame with two or several tracks offers infinite glazing surfaces with 56 mm thick double or triple glazing and no weight limit.

The Vitrocsa V56 window has been developed using the same mechanical features as the Vitrocsa systems that have proven their reliability for over 30 years.

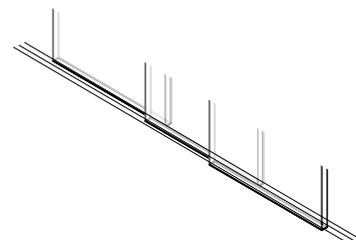


RAILS + FRAMES

- Embedded and concealed in the floor, wall and ceiling
- Frame just 172 mm wide for a birail (mono: 80 mm + 12 mm seal)
- Saline treatment specially adapted for coastal projects

VERTICAL CONNECTION

- 22 mm
- Reinforced for very windy locations or installation at high altitudes
- Optimised heat retention with fibreglass towers

MAIN CROSS SECTIONS

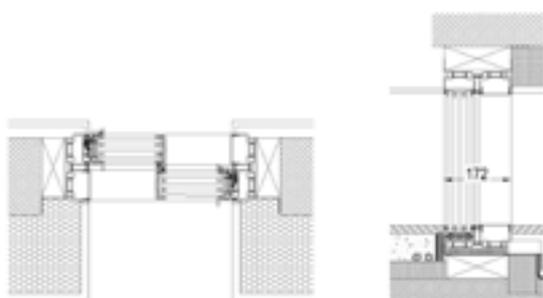

APPLICATIONS

- Pocket
- Open angle
- Motorisation
- Mosquito net

GLAZING

- 56 mm double or triple glazing
- Depending on configuration

CLOSURE MECHANISM

- 2-point closure button
- Electric closure
- Alarms

V56 RANGE INVISIBLE FRAME WITH TWO TRACKS

PERFORMANCE

To clearly demonstrate the properties of the VITROCSA V56 INVISIBLE FRAME WITH TWO TRACKS window, we have conducted standardised tests in an accredited laboratory (SWISS TESTING SERVICE NUMBER STS 317).

The results of these investigative tests are shown in the table below:

V56 fixed-sliding	Standards (test and classification)	Classification
Air permeability	EN 1026 (test) EN 12207 (classification)	Class 4
Water permeability	EN 1027 (test) EN 12208 (classification)	Class 9A
Wind resistance	EN 12211 (test) EN 12210 (classification)	Class B5
Repeated opening/closing	EN 1191 (test) EN 12400 (classification)	Class 3 (20,000 cycles)
Resistance to a vertical load	EN 14608 (test) EN 13115 (classification)	Class 3 (600 N)